




Sample Cylinder Head Requirements

1. Heads should be as clean as possible.
2. Please include enough hardware for one cylinder: correct valves, spark plug, and a head gasket are required. If head is left assembled, please install light test springs on one cylinder.
3. Please verify that all samples and components are clearly tagged and, if possible, marked with a permanent marker with the customer name and account number.

Surface contamination reduces accuracy of measurements!

BAD

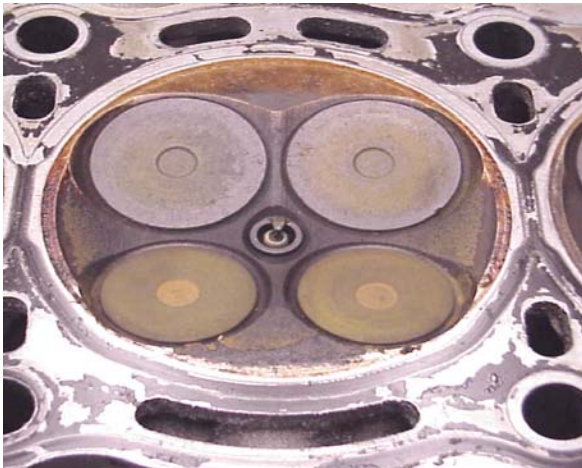

GOOD

